

# **RieVo BV**


*Handelsonderneming*



## **AGILE**

**THE MOST COMPACT EXPRESSION OF POWER**

**THE SMALLEST, FASTEST & STRONGEST FORKLIFT OF THE POULTRY INDUSTRY**

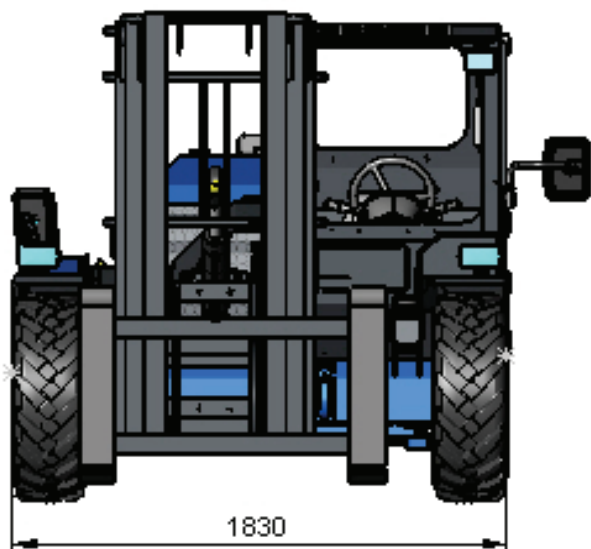

**Compact&Agile**

Only 1,6 meters high and 3,30 meters long, this compact machine is perfect in low and multi-floor houses.

The special back wheel steering with a turning radius of 3,3 meter, helps the AGILE to turn in narrow spaces.

**Fast&Powerful**

The powerful Perkins engine allows the AGILE to go up to 27 Km/H.

**User friendly**

With only a few commands the driver can operate easily and with precision. The side mounted cabin is easy to enter, for quick access in and out.

**Version**

Depending on your wishes the forklift can be mounted with a Closed or Open cabin, protecting the driver. The Closed cabin can be equipped with heating and air conditioning.

**Air Filter**


Since the AGILE is born for the poultry field, it is equipped with a triple air filter for protecting the engine.

**Optional**

The optional Side-shift can help to make the job easier and faster. The standard hydraulic sockets allows other equipment to be used in combination with the forklift, such as the RIEVO Sweeper, for cleaning the houses.

**Counterweight**

The counterweight on the back of helps the Forklift to be stable when working with double containers.

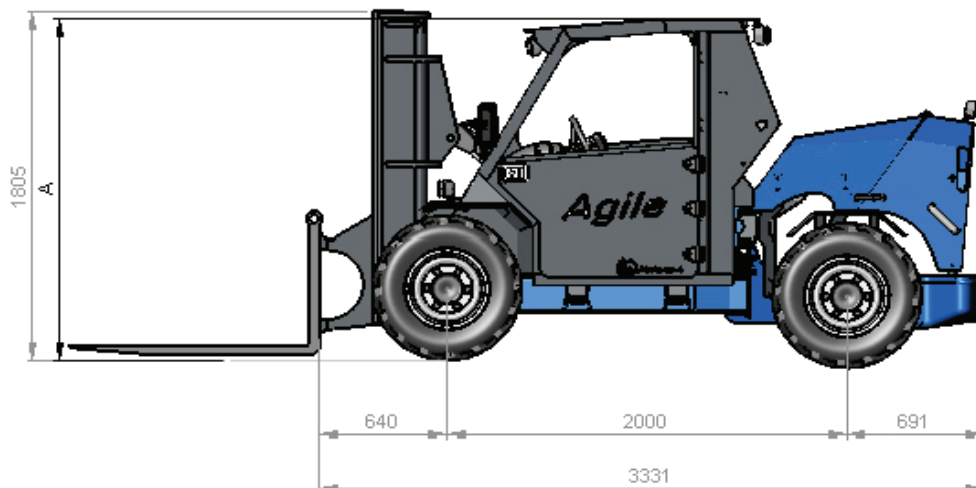

“A” DEPENDS ON DIFFERENT TYPE OF CABIN

TYPE OF CABIN	HIGH
Low cabin	1650 mm
High cabin	1800 mm


## PERFORMANCE

Maximum load	2000 KG / 4410 LB
Maximum height	Changeable
Fork rotation angle	+10° / -10°
Tearing force	2.400 DaN
Total empty weight	3700 KG
Speed	27 Km/H

## TRANSMISSION

Hydrostatic transmission with variable displacement  
4 hydraulic motors  
2 hydraulic pedals for forwards and backwards movement  
Handbrake by electric switch

## ENGINE

 Perkins	803 D
Maximum net power	47 Kw / 64 HP
Type	4 stroke
Cylinders	4 in vertical line
Displacement	3.300 cc
Cooling	Liquid
Max. Rpm	2600

## CAPACITY

Hydraulic oil tank	120 Lt
Fuel tank	75 Lt

## PNEUMATICS


Front/Back	10.0 / 75 – 15,3
------------	------------------

## STANDARD FEATURES

Hydraulic socket for attachments  
Self clearing cyclone filter

## OPTIONAL FEATURES

Closed cab  
Heater  
Air conditioning  
Side-shift  
Rotator

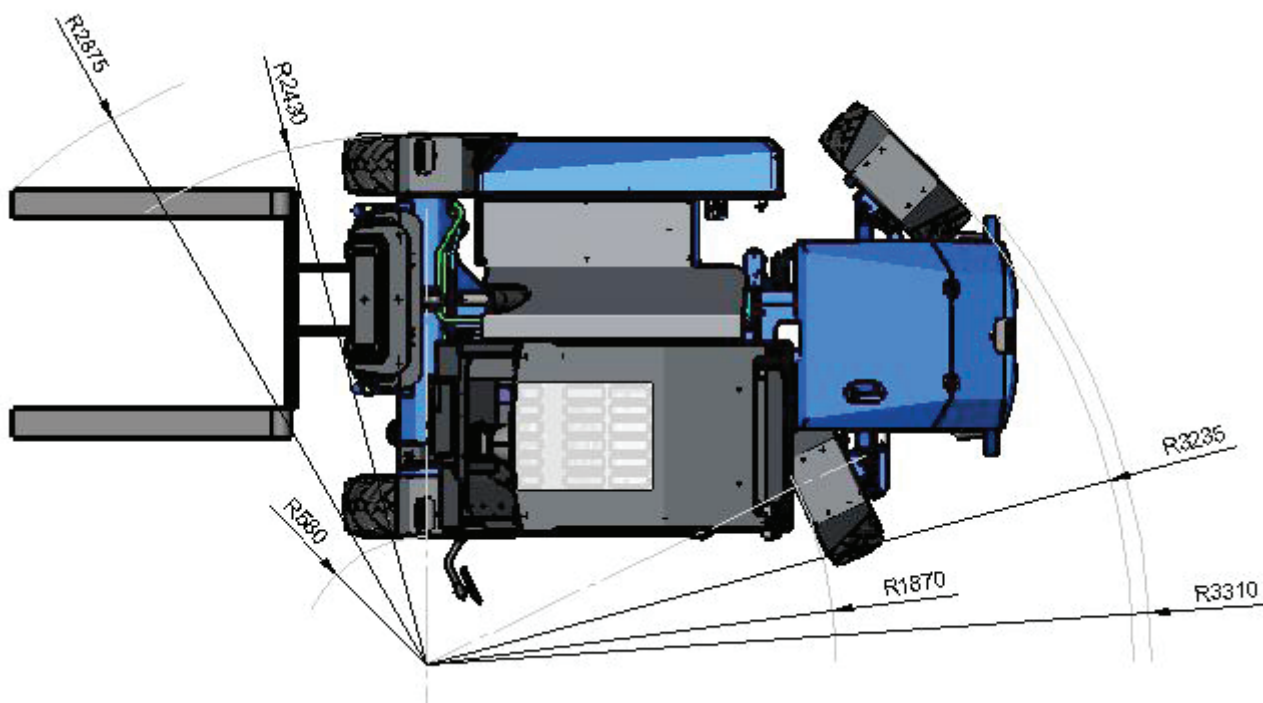

 **RieVo BV**  
Handelsonderneming

Rievo Handelsonderneming | Blokenstraat 12a | 4885 JH Achtmaal  
T +31 (0)76 598 51 47 | F +31 (0)76 598 52 25 | E info@rievo.nl

Version 1.6: 21.09.2011

**WWW.RIEVO.NL**